



WILO Initial Jet 3-4 Jet 4-4 Jet 9-4

APPLICATION

Selfpriming jet water pumps with a very high hydraulic performance and a considerable pressure capacity.

Able to pump up to mt. 8 depth and work perfectly even in soda-water.

Suitable for water lifting and distribution in domestic fittings by small and medium sized tanks.

OPERATING CONDITIONS

- Liquid temperature up to 35°C
- Ambient temperature up to 40°C
- Total suction lift up to 8 mt.
- Continuous duty

MOTOR

- Two-Pole induction motor (n = 2850 min⁻¹)
- Insulation Class F
- Protection IP 44


MATERIALS

- Pump body Cast Iron
- Motor Support Aluminium
- Impeller Noryl
- Impeller (Jet4-4 / Jet 9-4) Stainless Steel AISI 304
- Diffuser Noryl
- Pump flange Stainless Steel AISI 304
- Shaft with rotor Stainless Steel AISI 304
- Mechanical seal Ceramic/Graphite/NBR

Tel: 0909.228.359 / 0909.228.350

TECHNICAL DATA

	Jet 3 - 4	Jet 4 - 4	Jet 9 - 4
P1	0,85 kW	1,1 kW	1,5 kW
P2	0,60 kW	0,75 kW	1,1 kW
Current	3,8 A	5 A	7 A
Voltage	230 V 50 Hz	230 V 50 Hz	230 V 50 Hz

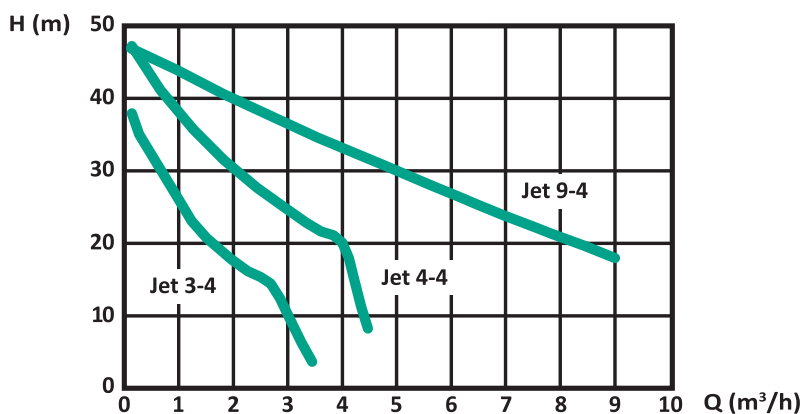

Web: bomnuocwilo.com